




APE VIBRATORY SIDE GRIP

DEEP FOUNDATION SOLUTION

MODEL 70SG

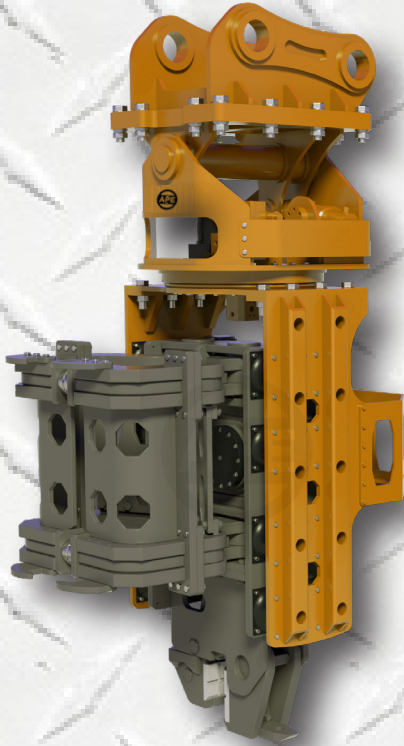




70SG	Metric	Imperial
Suitable Excavator	36 - 50 ton	40 - 55 US ton
Weight	3,800 kg	8,378 lbs
Setting Pressure	280 bar	4,061 psi
Oil Flow	240 - 260 lpm	63 - 68 gpm
Centrifugal Force	700 kN	71 tons
Eccentric Moment	8.2 kgm	713 in-lb
Frequency	2,200 - 2,800 vpm	2,200 - 2,800 vpm
Rotation	360°	360°
Dimension (D x W x H)	1,560 x 1,110 x 2,918	61" x 44" x 115"
Tilting Degree	±30	±30

*Specifications may vary due to site conditions, specific hammer conditions or product set up.
Specifications may change without notice.
Consult the factory for details on any specific product (800) 248-8498.*

STANDARD CLAMP

ROUND PILE CLAMP (S)

ROUND PILE CLAMP (L)

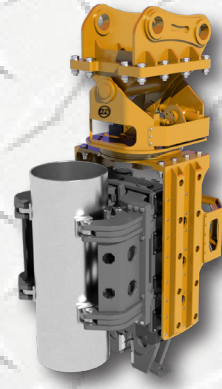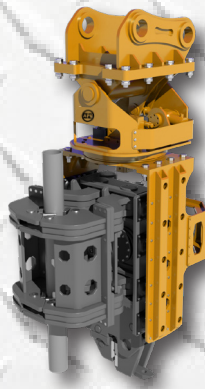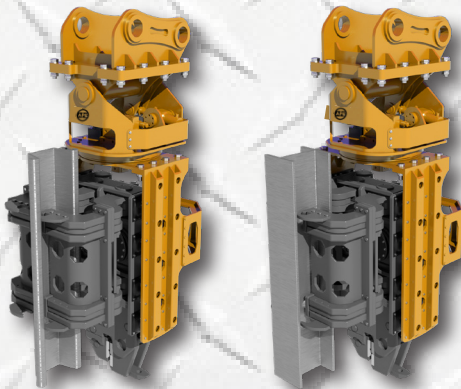

Sheet Pile



H Beam Pile



Min O.D - Max O.D
7 in - 13 in
178mm - 330mm



Min O.D - Max O.D
14 in - 24 in
335mm - 609mm



800-248-8498

WWW.AMERICANPILEDRIVING.COM

VISIT US

