


J&M Accessories for Vibratory Driver / Extractors

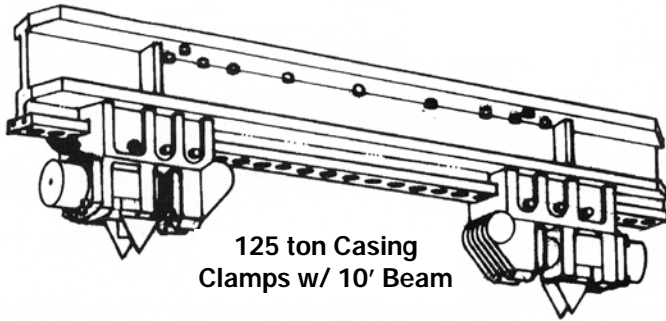


Casing and Pipe Clamps

- Various models of clamps and beam lengths to fit any project application with any J&M hammer.
- Select either the conventional wedge-screw clamp-to-beam locking device or upgrade to the advanced Hydro-Lock hydraulic locking system. With this system, simply shift the clamps to the desired location on the beam and cycle the clamps to securely lock the clamps in place.
- All J&M casing clamps include internal holding valves for safety and extra-heavy wall cylinders machined from solid blocks to eliminate cylinder guards.

CASING CLAMPS	80 ton Casing Clamps w/ 3' Beam	80 ton Casing Clamps w/ 7' Beam	80 ton Casing Clamps w/ 11' Beam	125 ton Casing Clamps w/ 10' Beam
Fits Models	216, 216E, 11-23 & 22-23	416, 44 & 66	44 & 66	66 & 1412
Clamping force	160 ton (1425 kN)	160 tons (1423 kN)	160 tons (1423 kN)	250 tons (2225 kN)
Weight	2,650 lb (1200 kg)	3,260 lbs (1479 kg)	6,360 lb (2885 kg)	10,000 lb (4535 kg)
Length	62 in (1575 mm)	110 in (2795 mm)	150 in (3810 mm)	150 in (3810 mm)
Width	14 in (355 mm)	14 in (355 mm)	14 in (355 mm)	17 in (435 mm)
Height	26 in (660 mm)	26 in (660 mm)	35 in (889 mm)	53 in (1345 mm)

Specialty Clamps

- J&M manufactures specialty piling clamps to fit all J&M vibratory drivers to solve any of your specialty application requirements.
- J&M Z-Pile clamps are ingeniously designed with double clamping locations to grip both flanges of a Z-style sheet pile providing the ability to drive single sheets with the hammer perpendicular to the line of the wall. This is very useful in severe applications where double sheets cannot be driven due to difficult driving conditions. This clamp will drive double sheets as well.
- J&M combination concrete / timber / pipe clamps will drive concrete piles from 10" to 20" square, timber piles from 8" to 19" butt diameter and pipe piles up to 18" diameter.

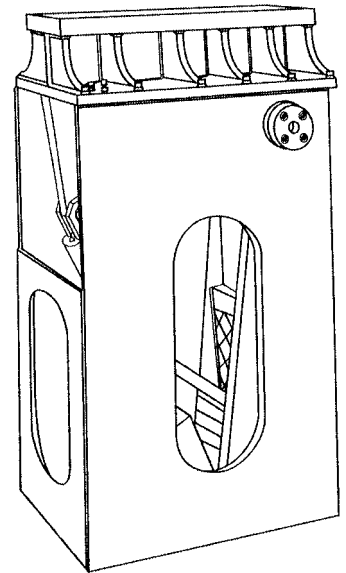

Combination Concrete, Timber & Pipe Clamp

HYDRAULIC CLAMPS	Single Sheet Z-Pile Clamp	Combination Concrete Timber & Pipe Clamp
Fits Models	416, 44 & 66	216,216E,11-23,22-23,416&44
Clamping force	125 tons (1112 kN)	53 ton (470 kN)
Weight	3,190 lbs (1447 kg)	4,970 lb (2255 kg)
Length	48 ½ in (1230 mm)	43 in (1095 mm)
Width	18 in (460 mm)	27 in (685 mm)
Height	41 ¼ in (1050 mm)	79 in (2005 mm)

Other Vibratory Driver Accessories

- J&M offers an optional **wireless digital radio remote system** consisting of a lightweight handheld remote unit plus a compact receiver unit that plugs into the control panel. Use this system for unlimited operator freedom of movement.
- J&M offers clip-on **segmental bias weights** for all J&M vibratory drivers. Use these weights for high friction or otherwise difficult soils to increase the driving capacity. Weights are quickly removable for jobs where light weight is more important.



1601 Banksville Road Pittsburgh Pa 15216-3205

PH: 866-462-PART / 412-341-8190 / 412-720-5175

E-Mail: info@jandm-usa.com FAX: 412-341-8192